




NIK15218 ▲




1220mm*180mm



1220mm*229mm



1511mm*229mm



1830mm*228mm




2230mm*228mm

EVOLUTION-ESPC

Engineered Solid Plastic Composite(ESPC) combines advantages of both SPC and LVT, it remains the excellent dimensional stability, being water-proof, rigid of SPC, but also provides softness of LVT. With IXPE cushioned backing, ESPC provides a quieter, warmer vinyl flooring. ESPC is available with locking system and EIR embossing.

Engineered SPC

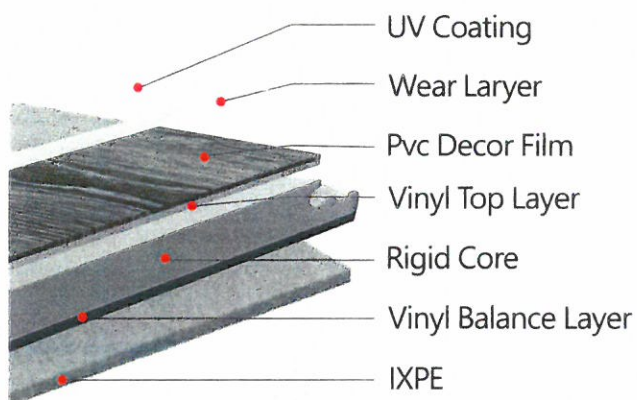

TECHNICAL DATA

Thickness		4.5-7.0mm
Density		1.88~1.94g/cm ³
Wearlayer		0.3/0.5/0.7mm
Dimensional stability	ISO23999:2008	X Direction: 0.03% Y Direction: 0.02%
Curling	ISO23999:2008	≤0.5mm
Residual indentation	ISO 24343-1:2007	~0.04mm
Light stability	ISO105-B02:Method 3	≥6
Castor chair	EN 425	Typ W
Classification	EN ISO 10582	23,31/33, 42/34,43
Reaction to fire	EN 13501-1	Bfl-S1
Slip resistance	DIN 51130 EN 13893	R10 DS
Wear resistance	EN 660-2	Group T
Thermal resistance	EN 12667:2001	0.042m ² K/W
Determination of resistance to stains chemical resistance	ISO26987:2008	Resistant
Squareness	ISO24342:2007	Deviation range: X Direction: 0.00mm~+0.05mm Y Direction:0.00mm~+0.05mm
Straightness	ISO24342:2007	Deviation range: X Direction: 0.00mm~+0.03mm Y Direction:0.00mm~+0.05mm
Peel resistance	ISO 24345:2006	X Direction: 65N/50mm Y Direction: 65N/50mm
Burning cigarette test	EN1399:1997 Method B	Rating 3: Moderate change of gloss and moderate brown stain
Utilization		Recyclable